




6D Φ6.35x32 RoHS Compliant

玻璃保险丝管(快断型)

Glass Tube Fuse (Fast-Acting) 250V/125V

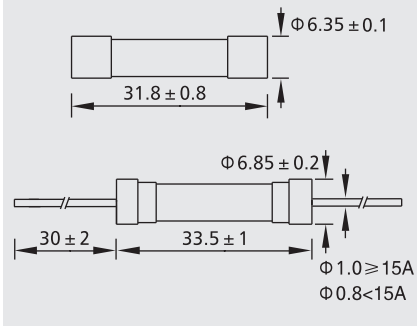

测试标准:
Testing Standard:
UL248-1 UL248-14

额定分断能力:
Interrupting Rating:
10000 Amperes at 125V AC
35 Amperes at 250V AC(100mA~1A)
100 Amperes at 250V AV(1.25A~3.5A)
200 Amperes at 250V AC(4A~10A)

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap:nickel plated brass
Glass tube:glass
Lead wire:tinned copper wire
Inner cap:nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
135%	1 hour Max(小于1小时)
200%	5 s Max(小于5秒)

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热积分 ² T Melting Integral (A ² .S)	认证 Approvals		
						
6D0100A/B	100mA	250/125V	0.003	●	●	
6D0160A/B	160mA	250/125V	0.008	●	●	
6D0200A/B	200mA	250/125V	0.020	●	●	
6D0250A/B	250mA	250/125V	0.026	●	●	
6D0300A/B	300mA	250/125V	0.047	●	●	
6D0315A/B	315mA	250/125V	0.055	●	●	
6D0350A/B	350mA	250/125V	0.072	●	●	
6D0400A/B	400mA	250/125V	0.10	●	●	
6D0500A/B	500mA	250/125V	0.16	●	●	
6D0630A/B	630mA	250/125V	0.28	●	●	
6D0750A/B	750mA	250/125V	0.49	●	●	
6D0800A/B	800mA	250/125V	0.6	●	●	
6D1100A/B	1A	250/125V	0.8	●	●	●
6D1125A/B	1.25A	250/125V	1.6	●	●	
6D1150A/B	1.5A	250/125V	2.5	●	●	
6D1160A/B	1.6A	250/125V	3.2	●	●	
6D1200A/B	2A	250/125V	5.6	●	●	●
6D1250A/B	2.5A	250/125V	7.6	●	●	
6D1300A/B	3A	250/125V	14	●	●	●
6D1315A/B	3.15A	250/125V	19	●	●	
6D1350A/B	3.5A	250/125V	20	●	●	
6D1400A/B	4A	250/125V	25	●	●	●
6D1500A/B	5A	250/125V	42	●	●	●
6D1600A/B	6A	250/125V	80	●	●	
6D1630A/B	6.3A	250/125V	96	●	●	
6D1800A/B	8A	250/125V	200	●	●	
6D2100A/B	10A	250/125V	320	●	●	●

Time-Current Characteristics
电流-时间曲线图

