



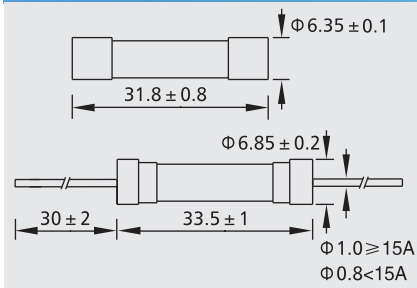

6K $\Phi 6.35 \times 32$ RoHS Compliant

玻璃保险丝管(延时型) Glass Tube Fuse (Time-Lag) 250V

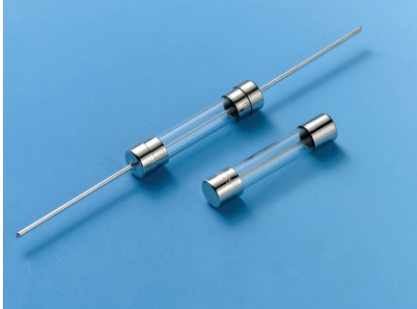

测试标准:
Testing Standard:
GB/T9364.1 GB/T9364.7

额定分断能力:
Interrupting Rating:
35A or 10In Whichever is greater

工作温度:
Operating Temperature:
 $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

材料:
Materials:
End cap: nickel plated brass
Glass tube: glass
Lead wire: tinned copper wire
Inner cap: nickel plated brass


焊接方法:
Soldering Method:
Wave soldering: 260°C , 10s max
Manual soldering: 350°C , 5s max

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time (8A~10A)	熔断时间 Opening Time (12.5A~16A)
210%	2 min Max (小于2分钟)	5min Max (小于5分钟)
275%	600 ms ~ 10 s	600 ms ~ 15 s
400%	150 ms ~ 3 s	150 ms ~ 5 s
1000%	20 ms ~ 300 ms	20 ms ~ 400 ms

目录编号: Catalog No.A:250V

带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals
					● 表示已获认证 ● 表示认证中 
6K1800A	8A	250V	100	550	●
6K2100A	10A	250V	100	853	●
6K2125A	12.5A	250V	100	1456	●
6K2160A	16A	250V	100	2854	●
6K2200A	20A	250V	80	3734	

Time-Current Characteristics
电流-时间曲线图

