


# 6B $\Phi 6.30 \times 25$ RoHS Compliant



## 英规插头保险丝管 British Plug Top Fuse 240V

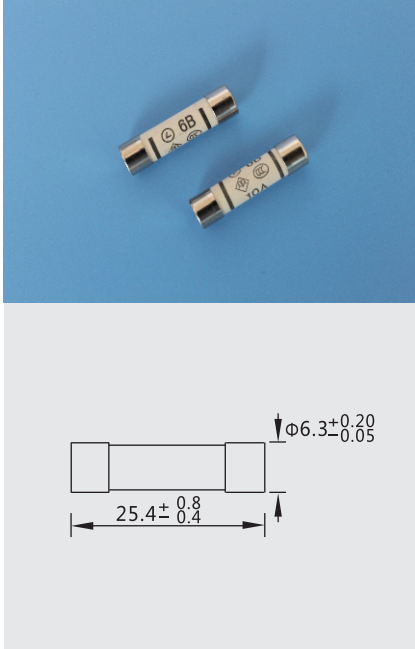

测试标准:  
Testing Standard:  
BS1362 IEC269-3A GB/T13539.3

额定分断能力:  
Interrupting Rating:  
6000 Amperes at 264 AC

工作温度:  
Operating Temperature:  
-55°C ~ +125°C

材料:  
Materials:  
End cap: nickel plated brass  
Ceramic tube: ceramic  
Brass eye: tin plated brass

### 电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	1000 hours Min(大于1000小时)
160%	30 min Min(大于30分钟)
190%	30 min Max(小于30分钟)

目录编号: Catalog No.S:240V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大功耗 Max Power Dissipation	熔化热能 <sup>2</sup> Melting Integral (A <sup>2</sup> .S)	认证 Approvals	
6B1200S	2A	240V	1Watt	9.0	●	●
6B1300S	3A	240V	1Watt	29.9	●	●
6B1500S	5A	240V	1Watt	78.7	●	●
6B1700S	7A	240V	1Watt	160	●	●
6B2100S	10A	240V	1Watt	328	●	●
6B2130S	13A	240V	1Watt	765	●	●

Time-Current Characteristics  
电流-时间曲线图

